


技术参数 (Specifications)


- 适应基板厚度 (Applicable PC Board thickness) : 0.8~1.2 mm
- 温度范围 (Temperature range) : -25℃~85℃
- 额定电压 (Voltage rating) : 125V AC/DC
- 额定电流 (Current rating) : 1A
- 绝缘电阻 (Insulation resistance) : $\geq 100M\Omega$
- 耐压 (Withstand voltage) : 250V AC/minute

阳连接器 (卧式, 表面装贴) Header (H, SMT)

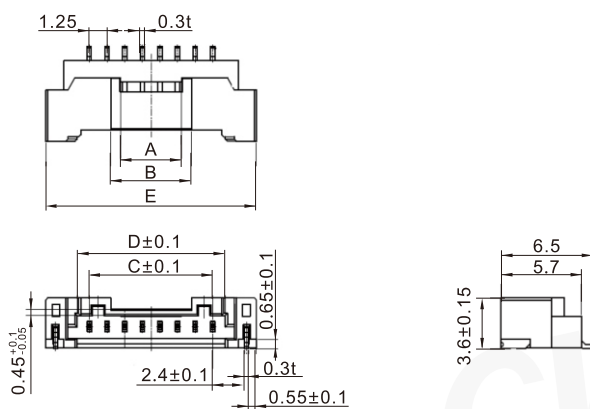

线数 Poles	型号Type	尺寸Dimensions (mm)				
		A	B	C	D	E
6	1102-66206	3.5	5.5	6.25	8.00	12.45
10	1102-66210	4.3	8.2	11.25	13.00	17.45
14	1102-66214	7.2	13.20	16.25	18.00	22.45
材质 · 表面处理 Material and Finish						
LCP UL94V-0; 磷青铜镀锡 Phos · bronze Tin · Plated						

安装尺寸 Mounting Measurement



PECOMMENDED P.C. BOARD
PATTERN DIMENSION(REF.)

COMPONENT SIDE