




技术参数 (Specifications)


适用线规 (Applicable wires) : AWG#28~AWG#22
 适应基板厚度 (Applicable PC board thickness) : 1.6mm
 温度范围 (Temperature range) : -20°C~85°C
 额定电压 (Voltage rating) : 250V AC/DC
 额定电流 (Current rating) : 5A
 接触电阻 (Contact resistance) : $\leq 20m\Omega$
 绝缘电阻 (Insulation resistance) : $\geq 1000M\Omega$
 耐压 (Withstand voltage) : 1500V AC/minute

插簧 Contact

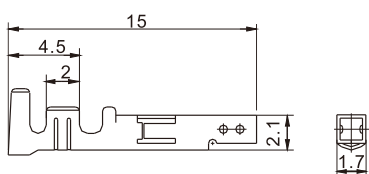


| 型号 Type | 适用导线范围 Wire Range | | 导线外径 Wire ins.Dis |
|-----------------------------------|-------------------|-------|----------------------|
| | mm ² | AWG# | |
| CH-TJC21 | 0.08~0.33 | 28~22 | 1.2~1.9 |
| 材质 · 表面处理 Material and Finish | | | |
| 磷青铜 镀锡 Phos · bronze Tin · Plated | | | |

孔座 Housing

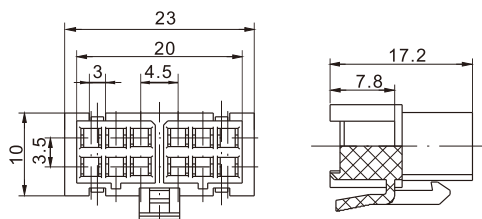

| 线数 Poles | 型号 Type |
|--------------|------------|
| 12 | TJC21-2x6Y |
| 材质 Material | |
| PA66 UL94V-0 | |

阳连接器 (卧式, 直插, 带挡板, 含定位柱) Header (H, DIP, W/PCB stabilizer,W/Boss)

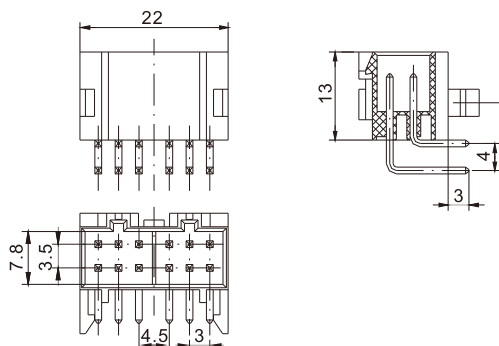

| 线数 Poles | 型号 Type |
|--|---------------|
| 12 | TJC21-2x6AWJD |
| 材质 · 表面处理 Material and Finish | |
| PA66 UL94V-0; 黄铜 镀锡 Brass Tin · Plated | |

安装尺寸 Mounting Measurement

