


技术参数 (Specifications)

适应基板厚度 (Applicable PC board thickness) : 0.8~1.6 mm
 温度范围 (Temperature range) : -40°C~105°C
 额定电压 (Voltage rating) : 500V AC/DC
 额定电流 (Current rating) : 3A
 接触电阻 (Contact resistance) : $\leq 20 \text{ m}\Omega$
 绝缘电阻 (Insulation resistance) : $\geq 1000 \text{ M}\Omega$
 耐电压 (Withstand voltage) : 500V AC/minute

阳连接器 (立式, 直插) Header (V,DIP)

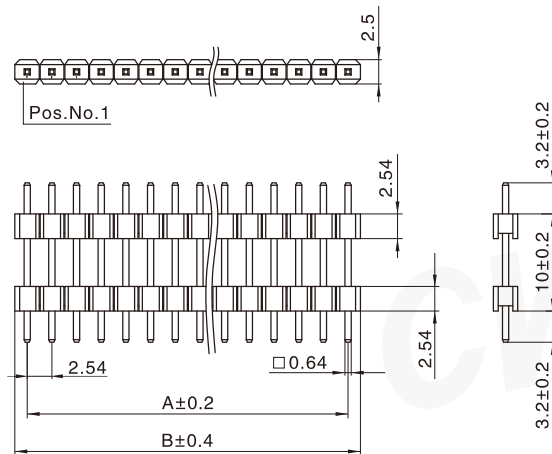


线数 Poles	型号 Type	尺寸 Dimensions (mm)	
		A	B
2	TJC25470-2A	2.54	5.08
3	TJC25470-3A	5.08	7.62
6	TJC25470-6A5Z(3)	12.70	15.24
8	TJC25470-8A	17.78	20.32
10	TJC25470-10A6Z(3.4.7.8)	22.86	25.40
14	TJC25470-14A	33.02	35.56
材质·表面处理 Material and Finish			
PBT+GF UL94V-0; 黄铜 镀金 Brass Gold · Plated PA UL94V-0; 黄铜 镀金 Brass Gold · Plated PA UL94V-0; 黄铜 镀锡 Brass Tin · Plated			

TJC25481/TJC25470 型条形连接器

TJC25481/TJC25470 Bar Connector


间距 (space) :2.54mm

阳连接器 (立式, 直插) Header (V,DIP)

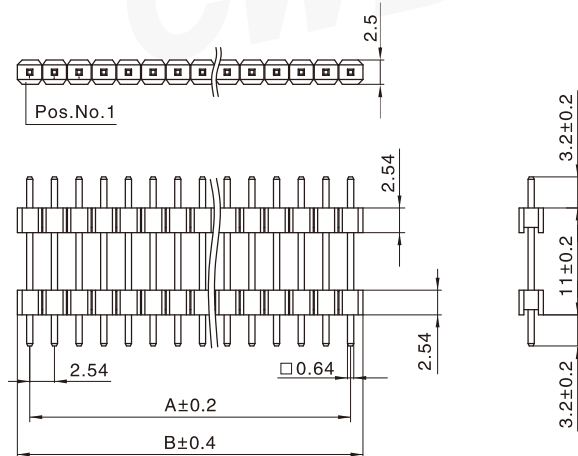

线数 Poles	型号 Type	尺寸 Dimensions (mm)	
		A	B
3	TJC25481-3A	5.08	7.62
10	TJC25481-10A6Z(3.4.7.8)	22.86	25.40
材质·表面处理 Material and Finish			
PA UL94V-0; 黄铜 镀锡 Brass Tin·Plated			


阳连接器 (立式, 直插) Header (V,DIP)

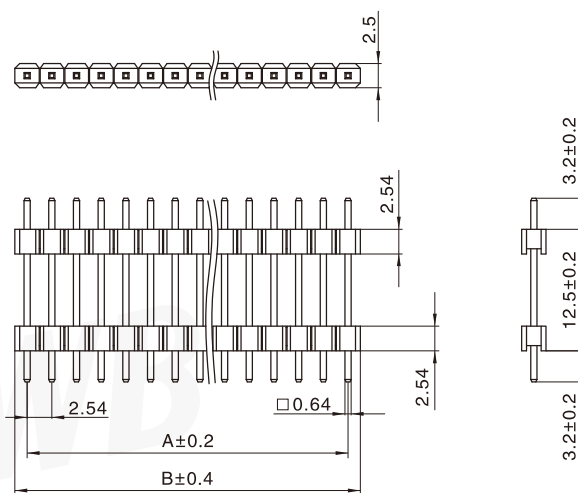


线数 Poles	型号 Type	尺寸 Dimensions (mm)	
		A	B
3	TJC25481B-3A	5.08	7.62
10	TJC25481B-10A6Z(3.4.7.8)	22.86	25.40
材质 · 表面处理 Material and Finish			
PA UL94V-0; 黄铜 镀锡 Brass Tin · Plated			

安装尺寸 Mounting Measurement

TJC25470-nA, TJC25481-nA, TJC25481B-nA

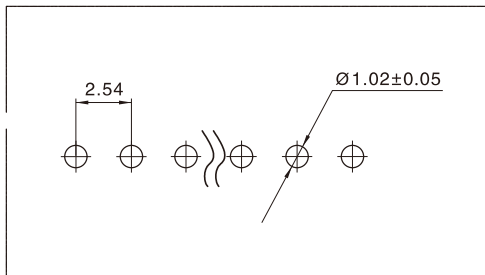

PCB Layout

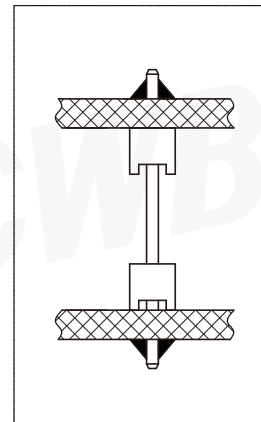

Assembly View
(DIM FYI)

CWB