


# WB25F 型条形连接器

## WB25F Bar Connector

间距 ( space ) :2.5mm

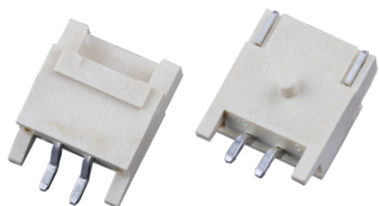

### 技术参数 ( Specifications )

适应基板厚度 ( Applicable PC Board thickness ) : 1.2~1.6 mm

温度范围 ( Temperature range ) : -25℃~85℃


额定电压 ( Voltage rating ) : 250V AC/DC

额定电流 ( Current rating ) : 3A

绝缘电阻 ( Insulation resistance ) :  $\geq 1000M\Omega$


耐压 ( Withstand voltage ) : 1000V AC/minute

### 阳连接器 (卧式, 表面装贴, 含定位柱) Header (H, SMT, W/Boss)

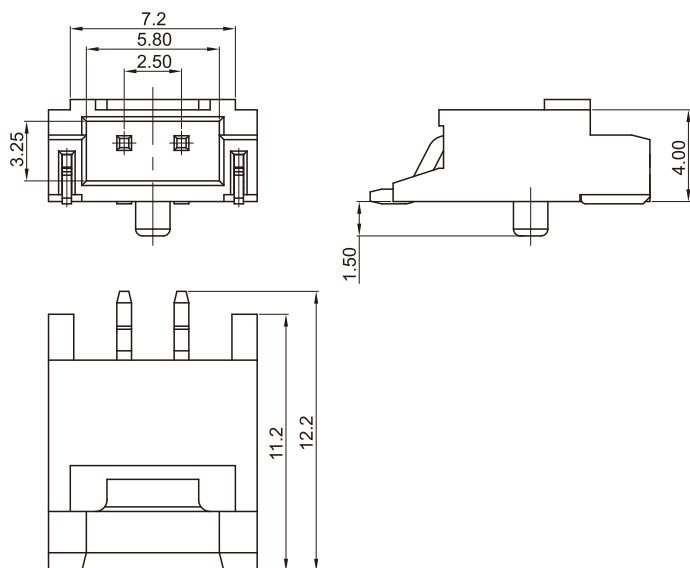

线数 Poles	型号 Type
2	WB25F-002-122
材质·表面处理 Material and Finish	
LCP UL94V-0; 黄铜 镀锡 Brass Tin·Plated	

### 安装尺寸 Mounting Measurement

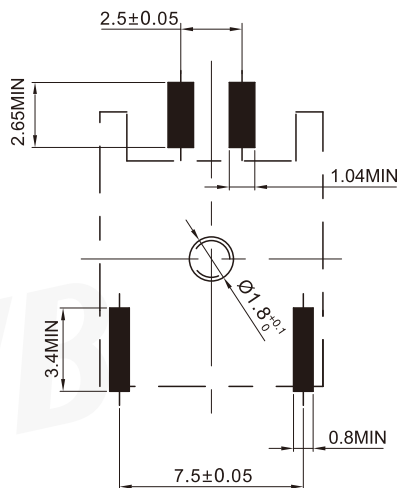

PCB Layout